

NORTH
FLOOR PLAN
 SCALE: 1/4" = 1'-0"

PLAN KEY NOTES:

- 1 NEW WALL PARTITION - 2x4 STUDS AT 16" O.C. w/ SOUND BATT INSUL. ABOVE. FINISH WITH 5/8" GYPSUM BOARD. EXIST. SAVED DR. & FRAME FILLING EXIST. REMOVE DOOR OR VISION PANEL WITH NEW 2x4 STUD FRAMING AND TYPE "M" GMB. EACH SIDE AND SOUND BATT INSULATION FIELD VERIFY EXIST. WALL THICKNESS & CONST. TYPE
- 2 EXISTING WOOD STUD COL. - FIELD VERIFY LOCATION
- 3 EXIST. BEARING WALL - PATCH WALL SURFACE AS REQD. TO RECEIVE PAINT - ALL NEW PAINT SHALL BE BY OWNER
- 4 PATCH ADJ. SURFACES AS REQD. - SEE WALL ELEVATION
- 5 PATCH ADJ. SURFACES AS REQD. - SEE WALL ELEVATION
- 6 PROVIDE NEW M.C. & L.V. - GRAB BARS RELOCATED FROM EXISTING REMOVED RESTROOM. VERIFY REQD. PUMPING ALTERATIONS - PROVIDE NEW IN-WALL BLOCKING TO SUPPORT FIXTURES PATCH TO MATCH EXIST.
- 7 EXIST. RESTROOM - EXIST. SH. VINYL FLR SHALL BE REMOVED AND REPLACED BY THE OWNER
- 8 EXIST. ELEC. PANEL AND SUB-PANELS - RELOCATED TO SERVER RM. N.I.C. PATCH ADJ. SURFACES TO MATCH EXIST.
- 9 EXIST. JANITOR CLOSET - EXIST. HWT AND JAN. SINK TO REMAIN
- 10 EXIST. LUNCH ROOM - EXIST. CABINETS, COUNTERTOP AND SINK TO REMAIN
- 11 CITY OF LAKE STEVENS SHALL REMOVE THE EXIST. EXTERIOR DOOR AND REPLACE WITH NEW EXTERIOR DOOR TO REVERSE DOOR SWING
- 12 PROVIDE NEW ACCESSIBLE DRINKING FOUNTAIN, ADULT AND CHILD SEE DTL. (A5)
- 13 60" DIAMETER MANEUVERING CLEARANCE
- 14 EXIST. FIRE EXTINGUISHER CABINET TO REMAIN
- 14B RELOCATED EXIST. FIRE EXTINGUISHER CABINET
- 15 RELOCATED/ADD NEW POWER ACTIVATED OPER. AND COMPATIBLE ACTUATORS SWITCH TO EXIST. STONE FRONT DOOR - VERIFY ACTUATOR SWITCH LOCATION
- 16 NEW POWER DOOR ACTUATOR SWITCH - VERIFY LOCATION WITH OWNER
- 17 EXIST. BUILDING EXTERIOR COL.
- 18 NEW LAPTOP BAR - N.I.C.
- 19 EXIST. FLOOR HATCH ACCESS TO CRAW SPACE
- 20 REPLACE EXIST. COL. WITH NEW COL. TO MATCH EXIST.
- 21 CONTRACTOR SHALL REMOVE AND RE-INSTALL EXIST. M.C. AS REQD. TO REMOVE AND INSTALL NEW FLOORING - COORDINATE SCHEDULE WITH OWNER
- 22 SEE SIGN SCHEDULE AND NOTES THIS SHEET.

PLUMBING FIXTURE/CONNECTION SCHEDULE

- (F-1) LAVATORY - PORCELAIN WALL MOUNTED SINK WITH ADA COMPLIANT FAUCET HARDWARE CONNECTIONS - 1/2" CM, 1/2" HX, WASTE 1-1/4", VENT 1-1/4"
- (F-2) ADA WATER CLOSET - 1.6 GPF FLUSH TANK, HANDICAP HEIGHT, ELONG BOWL CONNECTIONS - 1/2" CM, WASTE 3", VENT 2"
- (F-3) ACCESSIBLE DRINKING FOUNTAIN - MURDOCK WATER COOLER/BOTTLE FILLER A171.8-BF12 SERIES ADA BARRIER FREE WALL MOUNTED WITH BF12 SENSOR OPERATED BOTTLE FILLER

ROOM FINISHES & FURNISHING NOTE:


FLOOR FINISHES - N.I.C.
 SNO-ISLE LIBRARIES SHALL BE RESPONSIBLE FOR REMOVING ALL EXIST. FLOOR MATERIALS & INSTALLING ALL NEW CARPET, LVT, ETC. FOR ALL ROOMS, CORRIDORS AND RESTROOMS (ENTIRE BLDG.)
 WALL FINISHES - N.I.C.
 SNO-ISLE LIBRARIES SHALL BE RESPONSIBLE FOR ALL NEW INTERIOR PAINTING IN ALL ROOMS (ENTIRE BLDG.) CONTRACTOR IS RESPONSIBLE FOR ALL WALL PATCHING AT ALL NEW WORK AREAS FOR AN ACCEPTABLE SURFACE FOR PAINTING.
 NEW FURNITURE - N.I.C.
 SNO-ISLE LIBRARIES SHALL BE RESPONSIBLE FOR ALL NEW INTERIOR FURNITURE, SHELVING, AND BOOK CASE WORK EXCEPT NEW LAPTOP BAR

SIGN SCHEDULE:

KEY	TEXT	TACTILE SYMBOL	ACCESSIBLE SYMBOL	NOTES	YOUNGING HT. AFF.
(A)	RESTROOM	RAISE LETTER & BRAILLE	YES	1 THRU 5, 7	50" AFF
(B)	RESTROOM	RAISE LETTER & BRAILLE	YES	1 THRU 5, 7	50" AFF
(C)	DIRECTIONAL SIGNAGE			6	
(D)	STAFF ONLY	RAISE LETTER & BRAILLE		3 THRU 5, 7	50" AFF
(E)	MANAGER	RAISE LETTER & BRAILLE		3 THRU 5, 7	50" AFF
(F)	DATA ROOM	RAISE LETTER & BRAILLE		3 THRU 5, 7	50" AFF
(G)	MEETING	RAISE LETTER & BRAILLE		3 THRU 5, 7	50" AFF
(H)	DESIGNATION SIGN			9	

SIGN NOTES:

1. THE INTERNATIONAL SYMBOL OF ACCESSIBILITY SHALL BE THE STANDARD USED TO DESIGNATE FACILITIES THAT ARE ACCESSIBLE TO AND USABLE BY PHYSICALLY HANDICAPPED PERSONS.
2. THE SYMBOL SHALL CONSIST OF A WHITE FRAME ON A DARK BLUE BACKGROUND.
3. CONTRACTED GRADE 2 BRAILLE SHALL BE USED WHERE BRAILLE SYMBOLS ARE SPECIFICALLY REQUIRED
4. IN OTHER PORTIONS OF THESE STANDARDS, DOORS SHALL BE PER THE 2009 ICC A117.1 CHAPTER 7, 703.4, AND FIG. 703.4.3 BRILL MOSAICMENTS. SHALL BE DOSS SHALL ALSO BE RASSED PER FIG. 703.4.3
5. LETTERS AND NUMBERS ON SIGNS SHALL HAVE A WIDTH TO HEIGHT RATIO
6. PER THE 2009 ICC A117.1 CHAPTER 7, 703.2 AND 703.3
7. CHARACTERS AND SYMBOLS SHALL CONTRAST WITH THEIR BACKGROUND. EITHER LIGHT CHARACTER ON A DARK BACKGROUND OR DARK CHARACTER ON A LIGHT BACKGROUND.
8. DIRECTIONAL SIGNAGE SHALL COMPLY WITH THE 2009 ICC A117.1 CHAPTER 7, 703.2
9. REFER TO THE 2009 ICC A117.1 CHAPTER 7, 703.3.10 FOR TACTILE SIGN MOUNTING HEIGHT REQUIREMENTS ABOVE FINISHED FLOOR.
10. DESIGNATION SIGNS COMPLY WITH 2009 ICC A117.1 CHAPTER 7, SECTIONS 703.1, 703.2, AND 703.3




12022 Fifth Avenue NE, Suite 300
 Seattle, WA 98125
 P: 206.547.1940 | F: 206.547.8212
 salsabrien.com



KORD S KURISU
 ARCHITECT
 P.O. BOX 22
 1400 10TH AVENUE
 SEATTLE, WA 98108
 CONSULTANT

PROFESSIONAL SEAL

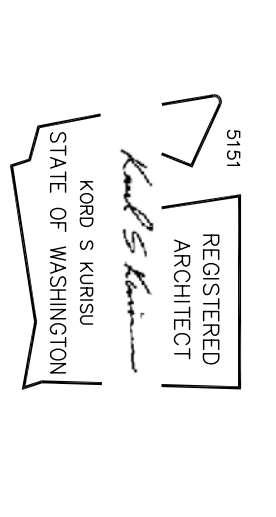

COPYRIGHT NOTICE

THIS DRAWING WAS PREPARED FOR USE ON A SPECIFIC DATE AND IS NOT SUITABLE FOR USE FOR ANY OTHER PROJECT OR PURPOSE. THE USE OF THIS DRAWING FOR REFERENCE OR SERVICES OF NON-REGISTERED ARCHITECTS OR ENGINEERS IS PROHIBITED. ANY REPRODUCTION OR TRANSMISSION OF THIS DRAWING WITHOUT THE WRITTEN AUTHORIZATION OF KORD S KURISU ARCHITECT IS NOT AUTHORIZED AND MAY BE CONSIDERED TO BE A VIOLATION OF THE COPYRIGHT LAWS OF THE UNITED STATES OF AMERICA.

ISSUE SETS

ISSUE SET	DATE
PERMIT SET	3/26/21
BID SET	4/29/21

REVISIONS

NO.	DATE	DESCRIPTION
1	4/29/21	PERMIT REVIEW REV.

SNO-ISLE LIBRARIES LAKE STEVENS TEMP. LIBRARY
 BUILDING ALTERATIONS
 2211 GRADE ROAD
 LAKE STEVENS, WASHINGTON

PROJECT MANAGER:
 CHECKED BY:
 DESIGNED BY:
 DRAWN BY:
 DOCUMENT DATE:
 3/26/21
 SHEET NAME:
 NEW FLOOR PLAN
 SHEET NO.
A-2
 OF 6